

SLVM

Technical Features



Modified Sine Wave Inverter




Overload & Short Circuit Protection



Comprehensive product model

Details show

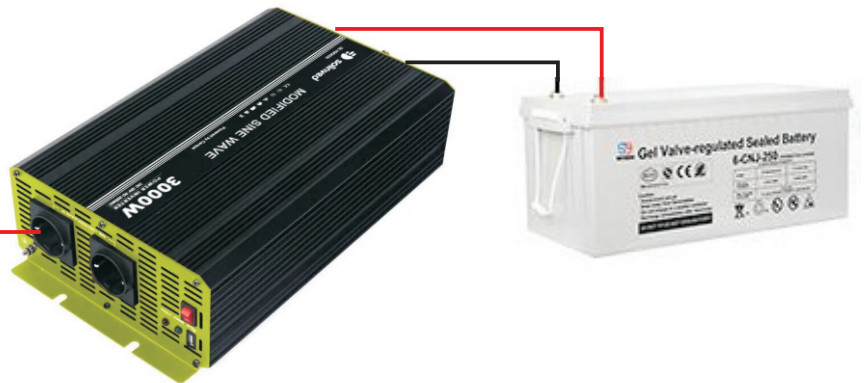

## Technical specifications

Model	SLVM300	SLVM600	SLVM1000	SLVM1500
Rated Power	300W	600W	1000W	1500W
Peak Power	600W	1200W	2000W	3000W
Output Waveform	Modified Sine Wave			
Input Voltage	12VDC			
Output Voltage	220VAC			
Certificate	CE			
Overload & Short Circuit Protection	Yes			
Overload Cut Off	Yes			
Built-in Cooling Fan	Yes			
Frequency range	50Hz/60Hz optional			
No-load current	<0.45A			
Voltage Range	10.5V-15.5V			
Efficiency	92% maximum			
Socket	For optional			
Max Outer Temperature	-10 to 50 °C			
Dimension,D x W x H (cm)	15.5x11.2x5.8	21.5x11.2x5.8	24.5x15x7.7	28.5x15x7.7
Net weight(kgs)	0.657	1.22	2.15	2.36

Model	SLVM2000	SLVM2500	SLVM1500	SLVM3000
Rated Power	2000W	2500W	1500W	3000W
Peak Power	4000W	5000W	3000W	6000W
Output Waveform	Modified Sine Wave		Modified sine wave	
Input Voltage	12VDC		24V	
Output Voltage	220VAC		220VAC	
Certificate	CE			
Overload & Short Circuit Protection	Yes			
Overload Cut Off	Yes			
Built-in Cooling Fan	Yes			
Frequency range	50Hz/60Hz optional			
No-load current	<0.63A			
Voltage Range	10.5V-15.5V		21V-31V	
Efficiency	92% maximum			
Socket	Schuko socket for EU			
Max Outer Temperature	-10 to 50 °C			
Dimension,D x W x H (cm)	32x16.7x9.2	34.5x23x10.8	28.5x15x7.7	42x23x10.8
Net weight(kgs)	3.76	5.3	2.36	6.2